


# Digital Multi-function Timer\_48X48

Catalogue Number : DT124S




## FEATURES

- LED dual display 11 segment for Process Value and 7 segment for Set value
- Display height of 15mm for PV
- Multi-voltage (88-276 VAC/DC) and Multi-range (0.01S to 999H)
- Memory option (Retentive function) in event of break in supply
- Lock function to menu and time
- User selectable up or down timing for process value
- Suitable for 48X48mm Panel mounting
- Short depth of only 65mm
- Two Relay output
- Intuitive LED symbol for lock, relay output, memory retention, signal and time range
- Compliant to IEC 61812-1
- IP 65 for front panel, IP 20 for terminals & IP 30 for housing

## CAUTION

- Do not touch the terminals while power is being supplied
- Tighten terminal screws with the specified torque
- Always follow instructions stated in product leaflet
- Before installation, ensure that specifications agree with intended application
- During installation, keep 10mm distance on both sides of product from adjacent devices
- Suitable dampers should be provided in the event of excessive vibrations
- Only qualified persons are authorized to install the product
- Automation & Control devices must be properly installed so that they are protected against any risk of involuntary actuations.
- Device should be kept away from wet, dust & humidity environments
- Device manufacturer will not be responsible if any incident occur due to negligence of cautions

## CONNECTION DIAGRAM



## TECHNICAL SPECIFICATIONS

Supply Characteristics					
Supply Voltage (Un)	110-240 VAC/DC				
Tolerance	-20%, +15% of Un				
Frequency	50/60 Hz(+/-3Hz)				
Power consumption	Max 5.5VA at 240V				
Relay Output Characteristics					
Number of Relays	2 nos.				
Contact arrangement	2 C/O contacts				
Contact rating	NC/NO - 5A @250VAC Resistive Load				
Mechanical Life	1 × 10 <sup>7</sup> Operations				
Electrical Life	1 × 10 <sup>6</sup> Operations				
Functional characteristics					
Display Type	Dual display-11segment(PV) & 7segment(SV)				
Display colour	PV Value-White, SV Value-Green, Symbol-Yellow				
No. of operating mode	4(ON Delay, Interval, Cyclic On First & Cyclic Off First)				
Timing Range	Sec	Min	Hours	Min:Sec	Hours:Min
	999	999	999	9.59	9.59
	99.9	99.9	99.9		
	9.99				
Counting Direction	User Selectable: Elapsed Time (Up) or Remaining Time (Down)				
Keypad	4 front key as ENT, MENU, LOCK & RST				
Setting Accuracy	+/-0.05% of set time or 50 msec(whichever is greater)				
Repeat Accuracy	+/-0.05%				
Memory Retention	10 Years				
Environmental Parameters					
Operating Temperature	-10 °C to 55 °C				
Storage Temperature	-25 °C to 70 °C				
Humidity	95% RH (Without condensation)				
Altitude	< 2000 meters				
Pollution Degree	2				
Over voltage category	III				
MTBF (IEC 62380)	Min.177009 Hours				
Mechanical Parameters					
Degree of protection					
Front panel	IP 65				
Terminals	IP 20				
Housing	IP 30				
Mounting	Panel				
Mounting position	any				
Dimensions ( W X H X D) in mm	48 x 48 x 65mm				
Housing	Flame retardant (UL94-V0)				
Weight (Unpacked)	Approx. 110 gm				

## ELECTROMAGNETIC COMPATIBILITY

### EMI / EMC Test

Harmonic Current Emissions	IEC 61000-3-2 Class A
ESD	IEC 61000-4-2 Level 3
Radiated Susceptibility	IEC 61000-4-3 Level 3
Electrical Fast Transients	IEC 61000-4-4 Level 4
Surge	IEC 61000-4-5 Level 3
Conducted Susceptibility	IEC 61000-4-6 Level 3
Power Frequency Magnetic Field	IEC 61000-4-8 Level 4
Voltage Dips & Interruptions (AC)	IEC 61000-4-11
Conducted Emission	CISPR-11 Class A
Radiated Emission	CISPR-11 Class A



## SAFETY DATA

Voltage Withstand test	
- Test Voltage between I/P and O/P	IEC 61812-1 2kV
- Test Voltage between all terminals and enclosure	IEC 61812-1 2.5kV
Impulse Voltage between I/P and O/P	IEC 61812-1 4kV
Insulation Resistance	IEC 61010-1, >100Mohm And > 500Mohm/250VDC/1min
Leakage Current	<3.5mA UL508
Single Fault test	IEC 61010-1


## ENVIRONMENTAL DATA

Cold Heat	IEC 60068-2-1
Dry Heat	IEC 60068-2-2
Damp Heat	IEC 60068-2-30
Vibration	IEC 60068-2-6

## TERMINAL TORQUE AND CAPACITY


 Ø 3.5 mm...4.0mm	0.5 N.m (4.5 Lb.in)
	2 x 1.5 mm <sup>2</sup> Solid/Stranded Wire
AWG	1 x 24 to 15

## MOUNTING DIMENSION (mm)

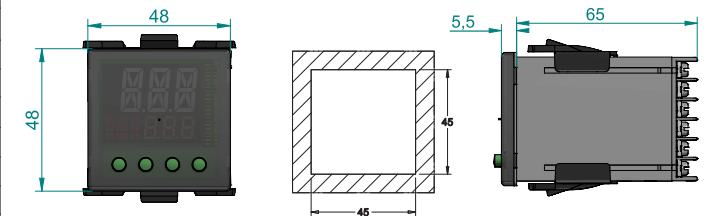

RECOMMENDED PANEL CUTOUT  
45 mmX 45 mm +0.5 mm

## FRONT FACIA



- 1) PROCESS VALUE (PV):** a) Display the Run time  
b) Display the parameter name during configuration mode
- 2) SET VALUE (SV):** a) Display the Set time  
b) Display the parameter setting during configuration mode

Symbol	Description
H,M,S	Time Range in Hour, Minute & Seconds
MR	Retentive mode On
SG	Presence of Start signal
ED	Configuration Editing mode
1	Output Relay 1 ON
2	Output Relay 2 ON
🔒	Time Lock is activated

## FRONT KEY DESCRIPTION

KEY	FUNCTION	
ENT	ENT+MENU	Enter Programming Mode
	ENT+LOCK	Enable Lock function
	ENT+RST	Enable Reset function
	Move to next configuration parameter & store the previous parameter setting	
MENU LOCK RST	Scroll different option in each configuration	
	Increment the set value for corresponding digit	

## MENU PARAMETER DESCRIPTION

### 1) START :Pulse/Gate

- Pulse :** Timing starts on momentary closure of switch between START & COMMON terminal
- Gate :** Timing starts at power on when the START & COMMON terminal is open and timing pauses when the START & COMMON terminal is short

### 2) Front panel reset(FPR) :Yes/No

- Yes :** The device can be reset from front panel
- No :** The device can not be reset from front panel

### 3) Power on Reset(POR) :Yes/No


- Yes :** The device will reset for every Power On
- No :** The device will not reset on Power On

### 4) Configuration lock(CFG) :LCH/ULH

- LCH :** Menu is locked
- ULH :** Menu is unlocked

## MENU INSTRUCTION


- To Edit the Menu Press ENT+MENU Key together for 3 Sec
- Change the function range by pressing any (LOCK/RST/MENU)Key
- Set the selected function range & go to the next parameter by pressing the 'ENT' Key
- To unlock the menu if password enabled press '107' by using (LOCK, RST & MENU)Key

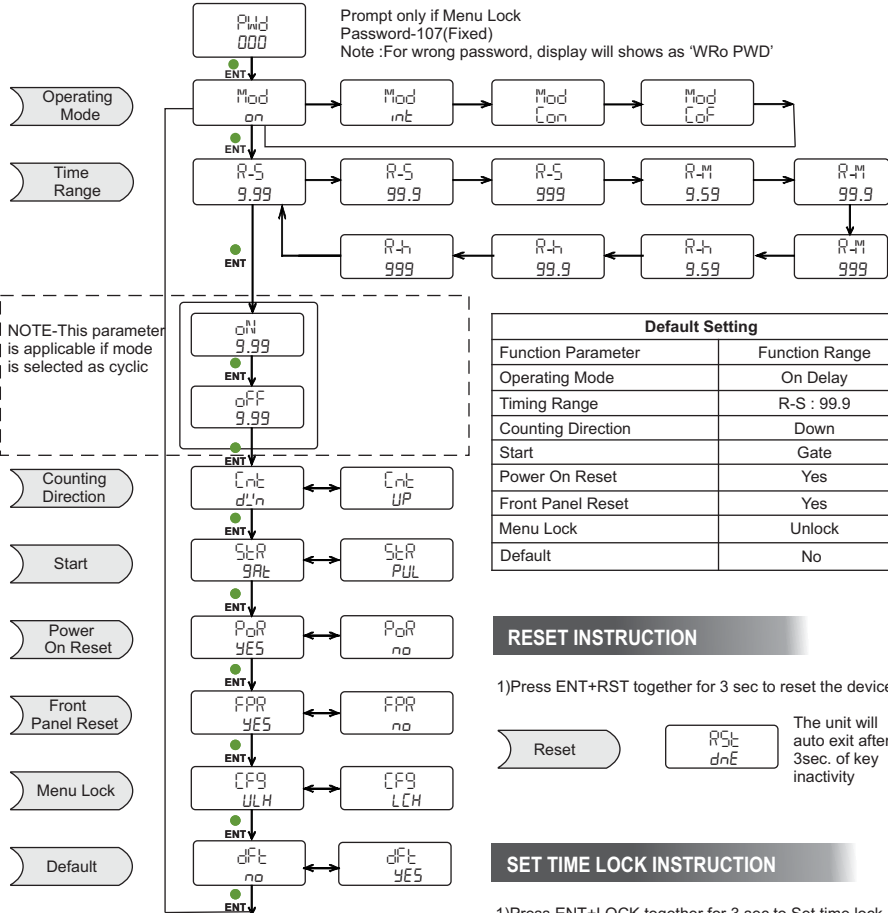

The unit will auto exit after 40 Sec. of key inactivity or by pressing Ent+Menu key together continuously for 3 sec

## PROGRAM THE SET TIME

- Press MENU/LOCK/RST key to change the set value. The corresponding digit will increment from 0 to 9.  
Mode-On Delay/Interval (M-MENU, L-LOCK, R-RST)




## RESET INSTRUCTION

- Press ENT+RST together for 3 sec to reset the device



## SET TIME LOCK INSTRUCTION

- Press ENT+LOCK together for 3 sec to Set time lock.




## FUNCTION DIAGRAM

### Operating Mode & Description

#### MODE 1: ON DELAY

##### START SIGNAL: PULSE


- The Timer starts when both Supply voltage & start signal (P) are applied. The relays are energized at the end of preset Time (T) and remains on till supply voltage is removed or next start (P) /reset signal is applied.
- Run/process time and relays are reset when reset signal is applied.
- In Continuous application of start signal, timer does not restart until device get a reset signal.

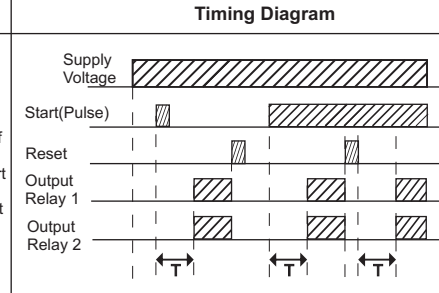

#### MODE 2: INTERVAL

##### START SIGNAL: PULSE


- When both Supply voltage and start signal (P) are applied, the Timer Starts and the output relays are energized. The output relay becomes OFF at the end of time duration (T).
- Run/process time and relays are reset when reset signal is applied.

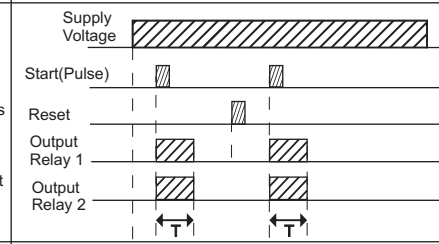

#### MODE 3&4: Cyclic On First, Cyclic Off First

##### START SIGNAL: PULSE

- Cyclic On first - When both supply voltage & start signal(P) applied, the output Relays initially ON for preset time duration (T1) after which it is OFF for the preset time (T2).
- This Cycle repeats and continues till the supply is present.

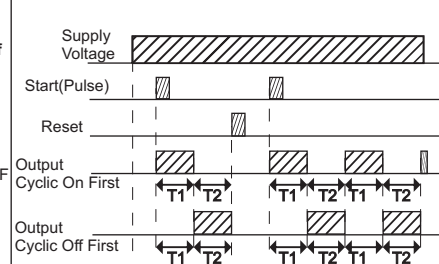


#### TYPICAL APPLICATION OF GATE

##### MODE: ON DELAY, INTERVAL

##### START SIGNAL: GATE

- When both supply voltage & Gate signal is applied, Timer is not started.
- After removing the Gate signal, timer starts.
- During the run/process time if Gate signal is applied then time paused till the Gate signal present.

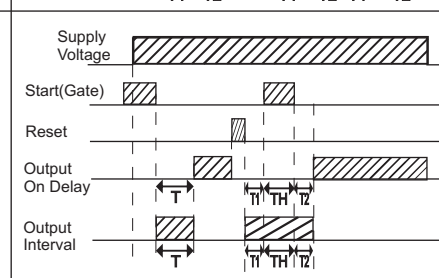

## NOTE

- The technical information provided in this document was correct at the time of publish
- Product innovation being a continuous process, we reserve the right to alter specifications without any prior notice

### E-Waste Regulatory notice:

Kindly treat, recycle or dispose of this equipment in an environmentally sound manner after End of Life, as per WEEE (Waste Electrical and Electronic Equipment) regulations or as per local norms; or hand it over to General Industrial control Pvt. Ltd, through website <https://www.gicindia.com/get-in-touch/>

