

# Current Monitoring Relay

- Protects against Overload, Phase Reverse, Phase Loss and Phase Unbalance faults
- Wide Range of Sensing Current : 1A-45A
- Models for 1 Phase and 3 Phase systems
- Auto/Manual Reset selection
- Fail-Safe Protection
- Inverse Time model with Under load, Locked Rotor Protection and Selectable Trip Class
- Definite Time model with Under load and selectable Start and Trip time





## Ordering Information

Cat. No.	Trip Type	Current	Auto Reset Time
17C112EB0	Inverse	3 A - 9 A	As per trip class
17C212EB0	Inverse	8 A - 24 A	As per trip class
17C312EB0	Inverse	15 A - 45 A	As per trip class
17C412EB0	Inverse	2 A - 5 A	As per trip class
17B822MM0	Definite	0.5 - 3 A	As per trip class
17B922MM0	Definite	0.2 - 1.4 A	As per trip class
17D112DA0	Definite	3 A - 9 A	6 min
17D212DA0	Definite	8 A - 24 A	6 min
17D312DA0	Definite	15 A - 45 A	6 min
17D412DA0	Definite	2 A - 5 A	6 min

# Current Monitoring Relay



Cat. No.		17C112EB0	17C212EB0	17C312EB0	17C412EB0
<b>Parameters</b>					
Supply Voltage (φ)		110 - 240 VAC			
Supply Variation		-20% to +10% of (φ)			
Frequency		50 / 60 Hz			
Power Consumption (Max.)		5 VA			
Trip Settings	Trip Type	Inverse Time	Inverse Time	Inverse Time	Inverse Time
	Tripping Class	10, 10, 20, 30	10, 10, 20, 30	10, 10, 20, 30	10, 10, 20, 30
	Current Ranges	3 - 9 A	8 - 24 A	15 - 45 A	2 - 5 A
	Thermal Memory	Yes	Yes	Yes	Yes
	Underload	40% to 90%	40% to 90%	40% to 90%	40% to 90%
	Trip Time	< 4sec after starting	< 4sec after starting	< 4sec after starting	< 4sec after starting
Number of In-Built CT's		1			
Reset Mode		Auto, Manual			
Test Function		Yes			
Time Delay	Start Time	N A	N A	N A	N A
	Delay Time	As per trip class	As per trip class	As per trip class	As per trip class
	Auto Reset Time	3-15 min*	3-15 min*	3-15 min*	3-15 min*
	ON Delay	450 ms ( ±50ms )			
Setting Accuracy		± 5%			
Repeat Accuracy		± 2%			
Output	Relay Output	1 C/O			
	Contact Rating	5A @ 240 VAC (Resistive)			
	Electrical Life	1 x 10 <sup>5</sup>			
	Mechanical Life	1 x 10 <sup>7</sup>			
Utilization Category	AC - 15	Rated Voltage (Ue): 120/240 V, Rated Current (Ie): 3.0/1.5 A			
LED Indications		ON: Power ON, UL: Underload, OL: Overload			
Operating Temperature		- 10° C to +60° C			
Storage Temperature		- 25° C to +70° C			
Humidity (Non Condensing)		95% (Rh)			
Enclosure		Flame Retardant UL94-V0			
Dimension (W x H x D) (in mm)		110.8 X 36.5 X 76.8			
Weight (unpacked) Approx.		200 g			
Mounting		Base Mounting			
Certification		 			
Degree of Protection		IP 20 for Enclosure			

## EMI / EMC

Harmonic Current Emissions	IEC 61000-3-2
ESD	IEC 61000-4-2
Radiated Susceptibility	IEC 61000-4-3
Electrical Fast Transients	IEC 61000-4-4
Surges	IEC 61000-4-5
Conducted Susceptibility	IEC 61000-4-6
Voltage Dips & Interruptions (AC)	IEC 61000-4-11
Power Frequency Magnetic Field	IEC 61000-4-8
Voltage Flickers & Fluctuation	IEC 61000-3-3
Conducted Emission	CISPR 14-1
Radiated Emission	CISPR 14-1

## Environmental

Cold Heat	IEC 60068-2-1
Dry Heat	IEC 60068-2-2
Vibration	IEC 60068-2-6

Note : \*As per trip class

# Current Monitoring Relay



Cat. No.		17D112DA0	17D212DA0	17D312DA0	17D412DA0
<b>Parameters</b>					
Supply Voltage (φ)		110 - 240 VAC			
Supply Variation		-20% to +10% of (φ)			
Frequency		50 / 60 Hz			
Power Consumption (Max.)		5 VA			
Trip Settings	Trip Type	Definite Time	Definite Time	Definite Time	Definite Time
	Tripping Class	N A	N A	N A	N A
	Current Ranges	3 - 9 A	8 - 24 A	15 - 45 A	2 - 5 A
	Thermal Memory	N A	N A	N A	N A
	Underload	50%	50%	50%	50%
	Trip Time	N A	N A	N A	N A
Number of In-Built CT's					
Reset Mode					
Test Function					
Time Delay	Start Time	0.2 to 30s	0.2 to 30s	0.2 to 30s	0.2 to 30s
	Delay Time	0.2 to 10s	0.2 to 10s	0.2 to 10s	0.2 to 10s
	Auto Reset Time	6 min	6 min	6 min	6 min
	ON Delay	450 ms ( ±50ms )			
Setting Accuracy		± 5%			
Repeat Accuracy		± 2%			
Output	Relay Output	1 C/O			
	Contact Rating	5A @ 240 VAC (Resistive)			
	Electrical Life	1 x 10 <sup>5</sup>			
	Mechanical Life	1 x 10 <sup>7</sup>			
Utilization Category	AC - 15	Rated Voltage (Ue): 120/240 V, Rated Current (Ie): 3.0/1.5 A			
LED Indications		ON: Power ON, UL: Underload, OL: Overload			
Operating Temperature		- 10° C to +60° C			
Storage Temperature		- 25° C to +70° C			
Humidity (Non Condensing)		95% (Rh)			
Enclosure		Flame Retardant UL94-V0			
Dimension (W x H x D) (in mm)		110.8 X 36.5 X 76.8			
Weight (unpacked) Approx.		200 g			
Mounting		Base Mounting			
Certification		 			
Degree of Protection		IP 20 for Enclosure			

## EMI / EMC



Harmonic Current Emissions	IEC 61000-3-2
ESD	IEC 61000-4-2
Radiated Susceptibility	IEC 61000-4-3
Electrical Fast Transients	IEC 61000-4-4
Surges	IEC 61000-4-5
Conducted Susceptibility	IEC 61000-4-6
Voltage Dips & Interruptions (AC)	IEC 61000-4-11
Power Frequency Magnetic Field	IEC 61000-4-8
Voltage Flickers & Fluctuation	IEC 61000-3-3
Conducted Emission	CISPR 14-1
Radiated Emission	CISPR 14-1

## Environmental

Cold Heat	IEC 60068-2-1
Dry Heat	IEC 60068-2-2
Vibration	IEC 60068-2-6

# Current Monitoring Relay



Cat. No.		17B822MM0	17B922MM0
<b>Parameters</b>			
Supply Voltage (φ)		220 - 415 VAC (3 Phase, 3 Wire)	
Supply Variation		-20% to +15% of (φ)	
Frequency		50/60 Hz	
Power Consumption (Max.)		12 VA	
Trip Settings	Trip Type	Definite Time	Definite Time
	Tripping Class	N A	N A
	Current Ranges	0.5 - 3 A	0.2 - 1.4 A
	Thermal Memory	N A	N A
	Phase Reverse Protection	Yes / (100 ms Approx.)	
	Phase Loss	> 70% of Unbalance	
	Current unbalance Protection	>50% of Unbalance	
	Underload	50 %	50%
Trip Time	N A	N A	
Number of In-Built CT's		2	
Reset Mode		Auto, Manual	
Test Function		Yes	
Time Delay	Start Time	0.2 to 30s	
	Delay Time	0.2 to 10s	
	Auto Reset Time	6 min	
	ON Delay	450 ms ( ±50ms )	
Setting Accuracy		± 5%	
Repeat Accuracy		± 2%	
Output	Relay Output	1 C/O	
	Contact Rating	5A @ 240 VAC (Resistive)	
	Electrical Life	1 x 10 <sup>5</sup>	
	Mechanical Life	1 x 10 <sup>7</sup>	
Utilization Category	AC - 15	Rated Voltage (Ue): 120/240 V, Rated Current (Ie): 3.0/1.5 A	
LED Indications		Separate indications for Phase Asymmetry, Phase Loss & Phase Sequence / Reverse, Power ON, Underload & Overload	
Operating Temperature		- 10° C to +60° C	
Storage Temperature		- 25° C to +70° C	
Humidity (Non Condensing)		95% (Rh)	
Enclosure		Flame Retardant UL94-V0	
Dimension (W x H x D) (in mm)		110.8 X 36.5 X 76.8	
Weight (unpacked) Approx.		200 g	
Mounting		Base Mounting	
Certification		 	
Degree of Protection		IP 20 for Enclosure	

## EMI / EMC

Harmonic Current Emissions	IEC 61000-3-2
ESD	IEC 61000-4-2
Radiated Susceptibility	IEC 61000-4-3
Electrical Fast Transients	IEC 61000-4-4
Surges	IEC 61000-4-5
Conducted Susceptibility	IEC 61000-4-6
Voltage Dips & Interruptions (AC)	IEC 61000-4-11
Power Frequency Magnetic Field	IEC 61000-4-8
Voltage Flickers & Fluctuation	IEC 61000-3-3
Conducted Emission	CISPR 14-1
Radiated Emission	CISPR 14-1

## Environmental

Cold Heat	IEC 60068-2-1
Dry Heat	IEC 60068-2-2
Vibration	IEC 60068-2-6

# Current Monitoring Relay





## Ordering Information

Cat. No.	Trip Type	Current	Auto Reset Time
17A122CB0	Inverse	3 A - 9 A	As per trip class
17A222CB0	Inverse	8 A - 24 A	As per trip class
17A322CB0	Inverse	15 A - 45 A	As per trip class
17A422CB0	Inverse	2 A - 5 A	As per trip class
17B122AA0	Definite	3 A - 9 A	6 min
17B222AA0	Definite	8 A - 24 A	6 min
17B322AA0	Definite	15 A - 45 A	6 min
17B422AA0	Definite	2 A - 5 A	6 min
17B122PA0	Definite	3 A - 9 A	Instant (< 500 msec)
17B222PA0	Definite	8 A - 24 A	Instant (< 500 msec)
17B322PA0	Definite	15 A - 45 A	Instant (< 500 msec)
17B422PA0	Definite	2 A - 5 A	Instant (< 500 msec)

# Current Monitoring Relay



Cat. No.	17A122CB0	17A222CB0	17A322CB0	17A422CB0	
<b>Parameters</b>					
Supply Voltage (φ)	220 - 415 VAC (3 Phase, 3 Wire)				
Supply Variation	-20% to +15% of (φ)				
Frequency	50/60 Hz				
Power Consumption (Max.)	12 VA				
Trip Settings	Trip Type	Inverse Time	Inverse Time	Inverse Time	Inverse Time
	Tripping Class	10A, 10, 20, 30	10A, 10, 20, 30	10A, 10, 20, 30	10A, 10, 20, 30
	Current Ranges	3 - 9 A	8 - 24 A	15 - 45 A	2 - 5 A
	Thermal Memory	Yes	Yes	Yes	Yes
	Phase Reverse Protection	Yes / (100 ms Approx.)			
	Phase Loss	> 70% of Unbalance			
	Current unbalance Protection	>50% of Unbalance			
	Underload	40% to 90%	40% to 90%	40% to 90%	40% to 90%
Trip Time	< 4sec after starting	< 4sec after starting	< 4sec after starting	< 4sec after starting	
Number of In-Built CT's	2				
Reset Mode	Auto, Manual				
Test Function	Yes				
Time Delay	Start Time	N A	N A	N A	N A
	Delay Time	As per trip class	As per trip class	As per trip class	As per trip class
	Auto Reset Time	3-15 min	3-15 min	3-15 min	3-15 min
	ON Delay	450 ms ( ±50ms )			
Setting Accuracy	± 5%				
Repeat Accuracy	± 2%				
Output	Relay Output	1 C/O			
	Contact Rating	5A @ 240 VAC (Resistive)			
	Electrical Life	1 x 10 <sup>5</sup>			
	Mechanical Life	1 x 10 <sup>7</sup>			
Utilization Category	AC - 15	Rated Voltage (Ue): 120/240 V, Rated Current (Ie): 3.0/1.5 A			
LED Indications	Separate indications for Phase Asymmetry, Phase Loss & Phase Sequence / Reverse, Power ON, Underload & Overload				
Operating Temperature	- 10° C to +60° C				
Storage Temperature	- 25° C to +70° C				
Humidity (Non Condensing)	95% (Rh)				
Enclosure	Flame Retardant UL94-V0				
Dimension (W x H x D) (in mm)	110.8 X 36.5 X 76.8				
Weight (unpacked) Approx.	210 g				
Mounting	Base Mounting				
Certification	 				
Degree of Protection	IP 20 for Enclosure				



## EMI / EMC

Harmonic Current Emissions	IEC 61000-3-2
ESD	IEC 61000-4-2
Radiated Susceptibility	IEC 61000-4-3
Electrical Fast Transients	IEC 61000-4-4
Surges	IEC 61000-4-5
Conducted Susceptibility	IEC 61000-4-6
Voltage Dips & Interruptions (AC)	IEC 61000-4-11
Power Frequency Magnetic Field	IEC 61000-4-8
Voltage Flickers & Fluctuation	IEC 61000-3-3
Conducted Emission	CISPR 14-1
Radiated Emission	CISPR 14-1

## Environmental

Cold Heat	IEC 60068-2-1
Dry Heat	IEC 60068-2-2
Vibration	IEC 60068-2-6



## TERMINAL TORQUE & CAPACITY

 Ø 3.5	0.45 N.m (4 Lb.in)
	1 x 4 mmsq Rigid wire (without wire protection) 1 x 2.5 mmsq (with wire protection)
AWG	1 x 22 to 12

**Note:** 2 A - 5A products can be used with external CT. Load wires to be passed through the external CT and Secondary's wire terminals are to be looped through the Product CT.

# Current Monitoring Relay



Cat. No.		17B122AA0	17B222AA0	17A322AA0	17A422AA0
<b>Parameters</b>					
Supply Voltage (φ)		220 - 415 VAC (3 Phase, 3 Wire)			
Supply Variation		-20% to +15% of (φ)			
Frequency		50/60 Hz			
Power Consumption (Max.)		12 VA			
Trip Settings	Trip Type	Definite Time	Definite Time	Definite Time	Definite Time
	Tripping Class	N A	N A	N A	N A
	Current Ranges	3 - 9 A	8 - 24 A	15 - 45 A	2 - 5 A
	Thermal Memory	N A	N A	N A	N A
	Phase Reverse Protection	Yes / (100 ms Approx.)			
	Phase Loss	> 70% of Unbalance			
	Current unbalance Protection	>50% of Unbalance			
	Underload	50%	50%	50%	50%
Trip Time		N A	N A	N A	N A
Number of In-Built CT's		2			
Reset Mode		Auto, Manual			
Test Function		Yes			
Time Delay	Start Time	0.2 to 30s	0.2 to 30s	0.2 to 30s	0.2 to 30s
	Delay Time	0.2 to 10s	0.2 to 10s	0.2 to 10s	0.2 to 10s
	Auto Reset Time	6 min	6 min	6 min	6 min
	ON Delay	450 ms ( ±50ms )			
Setting Accuracy		± 5%			
Repeat Accuracy		± 2%			
Output	Relay Output	1 C/O			
	Contact Rating	5A @ 240 VAC (Resistive)			
	Electrical Life	1 x 10 <sup>5</sup>			
	Mechanical Life	1 x 10 <sup>7</sup>			
Utilization Category	AC - 15	Rated Voltage (Ue): 120/240 V, Rated Current (Ie): 3.0/1.5 A			
LED Indications		Separate indications for Phase Asymmetry, Phase Loss & Phase Sequence / Reverse, Power ON, Underload & Overload			
Operating Temperature		- 10° C to +60° C			
Storage Temperature		- 25° C to +70° C			
Humidity (Non Condensing)		95% (Rh)			
Enclosure		Flame Retardant UL94-V0			
Dimension (W x H x D) (in mm)		110.8 X 36.5 X 76.8			
Weight (unpacked) Approx.		200 g			
Mounting		Base Mounting			
Certification		 			
Degree of Protection		IP 20 for Enclosure			



## EMI / EMC

Harmonic Current Emissions	IEC 61000-3-2
ESD	IEC 61000-4-2
Radiated Susceptibility	IEC 61000-4-3
Electrical Fast Transients	IEC 61000-4-4
Surges	IEC 61000-4-5
Conducted Susceptibility	IEC 61000-4-6
Voltage Dips & Interruptions (AC)	IEC 61000-4-11
Power Frequency Magnetic Field	IEC 61000-4-8
Voltage Flickers & Fluctuation	IEC 61000-3-3
Conducted Emission	CISPR 14-1
Radiated Emission	CISPR 14-1

## Environmental

Cold Heat	IEC 60068-2-1
Dry Heat	IEC 60068-2-2
Vibration	IEC 60068-2-6



## TERMINAL TORQUE & CAPACITY

 Ø 3.5	0.45 N.m (4 Lb.in)
	1 x 4 mmsq Rigid wire (without wire protection) 1 x 2.5 mmsq (with wire protection)
AWG	1 x 22 to 12

**Note:** 2 A - 5A products can be used with external CT. Load wires to be passed through the external CT and Secondary's wire terminals are to be looped through the Product CT.

# Current Monitoring Relay



Cat. No.		17B122PA0	17B222PA0	17A322PA0	17A422PA0
<b>Parameters</b>					
Supply Voltage (φ)		220 - 415 VAC (3 Phase, 3 Wire)			
Supply Variation		-20% to +15% of (φ)			
Frequency		50/60 Hz			
Power Consumption (Max.)		12 VA			
Trip Settings	Trip Type	Definite Time	Definite Time	Definite Time	Definite Time
	Tripping Class	N A	N A	N A	N A
	Current Ranges	3 - 9 A	8 - 24 A	15 - 45 A	2 - 5 A
	Thermal Memory	N A	N A	N A	N A
	Phase Reverse Protection	Yes / (100 ms Approx.)			
	Phase Loss	N A			
	Current unbalance Protection	N A			
	Underload	50 %	50%	50%	50%
	Trip Time	N A	N A	N A	N A
Number of In-Built CT's		2			
Reset Mode		Auto, Manual			
Test Function		N A			
Time Delay	Start Time	0.2 to 30s	0.2 to 30s	0.2 to 30s	0.2 to 30s
	Delay Time	0.2 to 10s	0.2 to 10s	0.2 to 10s	0.2 to 10s
	Auto Reset Time	120 ms to 400 ms	120 ms to 400 ms	120 ms to 400 ms	120 ms to 400 ms
	ON Delay	800 ms ( ±50ms )			
Setting Accuracy		± 5%			
Repeat Accuracy		± 2%			
Output	Relay Output	1 C/O			
	Contact Rating	5A @ 240 VAC (Resistive)			
	Electrical Life	1 x 10 <sup>5</sup>			
	Mechanical Life	1 x 10 <sup>7</sup>			
Utilization Category	AC - 15	Rated Voltage (Ue): 120/240 V, Rated Current (Ie): 3.0/1.5 A			
LED Indications		Separate indications for Phase Asymmetry, Phase Loss & Phase Sequence / Reverse, Power ON, Underload & Overload			
Operating Temperature		- 10° C to +60° C			
Storage Temperature		- 25° C to +70° C			
Humidity (Non Condensing)		95% (Rh)			
Enclosure		Flame Retardant UL94-V0			
Dimension (W x H x D) (in mm)		110.8 X 36.5 X 76.8			
Weight (unpacked) Approx.		200 g			
Mounting		Base Mounting			
Certification		 			
Degree of Protection		IP 20 for Enclosure			



## EMI / EMC

Harmonic Current Emissions	IEC 61000-3-2
ESD	IEC 61000-4-2
Radiated Susceptibility	IEC 61000-4-3
Electrical Fast Transients	IEC 61000-4-4
Surges	IEC 61000-4-5
Conducted Susceptibility	IEC 61000-4-6
Voltage Dips & Interruptions (AC)	IEC 61000-4-11
Power Frequency Magnetic Field	IEC 61000-4-8
Voltage Flickers & Fluctuation	IEC 61000-3-3
Conducted Emission	CISPR 14-1
Radiated Emission	CISPR 14-1

## Environmental

Cold Heat	IEC 60068-2-1
Dry Heat	IEC 60068-2-2
Vibration	IEC 60068-2-6


## TERMINAL TORQUE & CAPACITY

 Ø 3.5	0.45 N.m (4 Lb.in)
 AWG	1 x 4 mmsq Rigid wire (without wire protection) 1 x 2.5 mmsq (with wire protection)
	1 x 22 to 12


**Note:** 2 A - 5A products can be used with external CT. Load wires to be passed through the external CT and Secondary's wire terminals are to be looped through the Product CT.

# Current Monitoring Relay

## MOUNTING DIMENSION (mm)


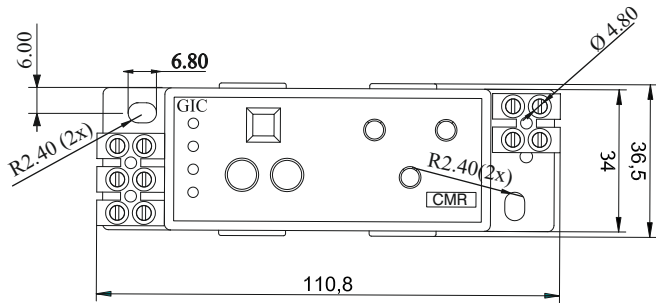


## RELAY CONNECTION DIAGRAM

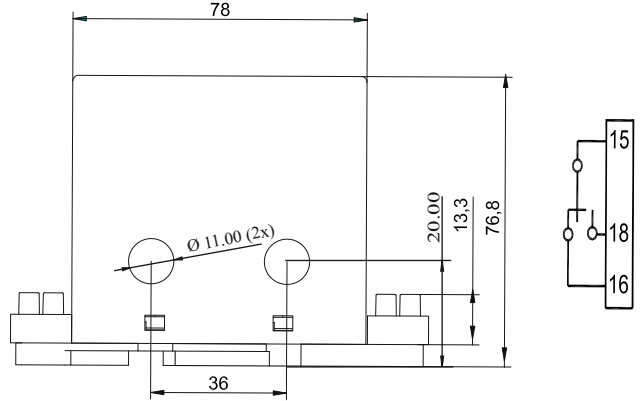

## CONNECTION DIAGRAM

### SINGLE PHASE

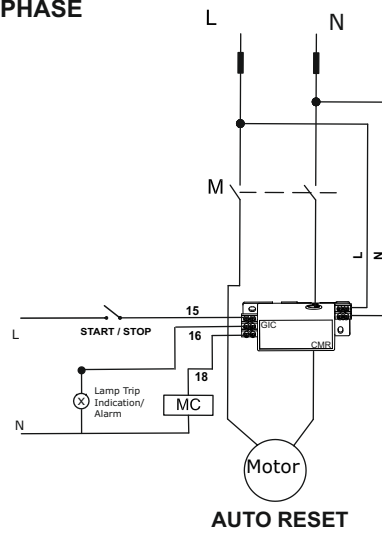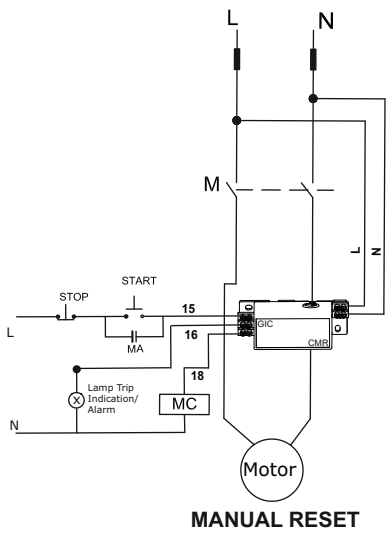

### THREE PHASE

